


Design Data

Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	A:Sleeve - B:Sleeve

0320 AR

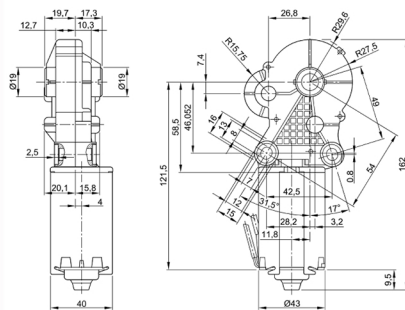

Performance data

Rated voltage [V]	U_N	24
Nominal torque [Nm]	M_N	4.00
No-load speed [min^{-1}]	n_0	20.0
Nominal power [W]	P_N	6.70
Nominal current [A]	I_N	2.0
Nominal force [kN]	F_N	0.00
Duty cycle		s3

Sensor data


Pulses	0
Output channels	0

Other data

Gear ratio	246.75/1
Gear wheel material	plastic
Suppression components	7,5 μ , 47nF
Enclosure class	IP 40
Weight [kg]	0.440

Remarks:

Characteristic curves

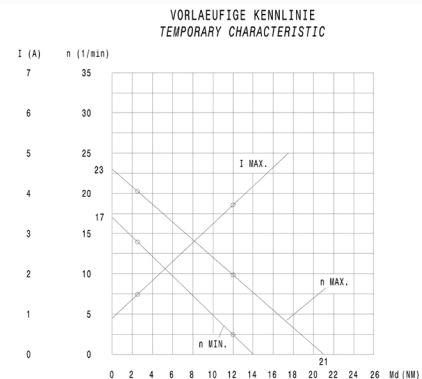


Motor picture




Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)

W 224



S 74



K 227

