

Design Data

Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	A: Ball - B: Sleeve

Performance data

Rated voltage [V]	U_N	24
Nominal torque [Nm]	M_N	4.00
No-load speed [min^{-1}]	n_0	64.0
Nominal power [W]	P_N	24.8
Nominal current [A]	I_N	4.0
Nominal force [kN]	F_N	0.00

Duty cycle

Sensor data


Pulses	1
Output channels	1

Other data

Gear ratio	69:1
Gear wheel material	Plastic
Suppression components	2
Enclosure class	IP30
Weight [kg]	0.000

Remarks: d = for thread-forming screw M6 DIN ISO 965-2

Characteristic curves

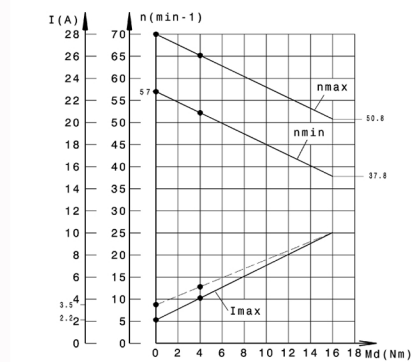


Motor picture




Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)

W 277



S 27



S150

